



SA10/ESP Patented MasterSan™

Flexible hose produced with exclusive technology by TECNICA SRL made of:

- Addivated polyolefin resins film with anti-bacterial, anti-mildew and anti-viral material protection.
- Thermo-insulating coating in netted and closed-cell of polyethylene foam.
- External protection in addivated polyolefin resins film.
- Embedded steel wire helix.

The assembly of materials for the construction of the flexible conduit does not require the use of chemical agents, glues or adhesives.

Thermal resistivity at 20°C $R = 0,12m^2 K/W$ (UNI EN 12664:2002)

MasterSan™
in collaboration with:



TECHNICAL SPECIFICATIONS AND USAGE LIMIT

COLOR	LENGTH	WORKING TEMPERATURE	PRODUCTION DIAMETERS	AIR SPEED	PRESSURE	CURVATURE RADIUS
Grey	10m standard	-20° + 90°C (peak +115°C)	from 40mm to 254mm	max 20m/sec	max 200 mmH ₂ O	1,2 - 1,8 x Ø

PRODUCTION DIAMETERS


40*	51	63	70	76	80	90*	102	110*	121*
127	133*	140*	152	160	165	180	203	254	

*Diameters available on request

Diameters other than those indicated are available by prior feasibility check.

PRESSURE DROPS DIAGRAM

(Air Temperature 20°C)

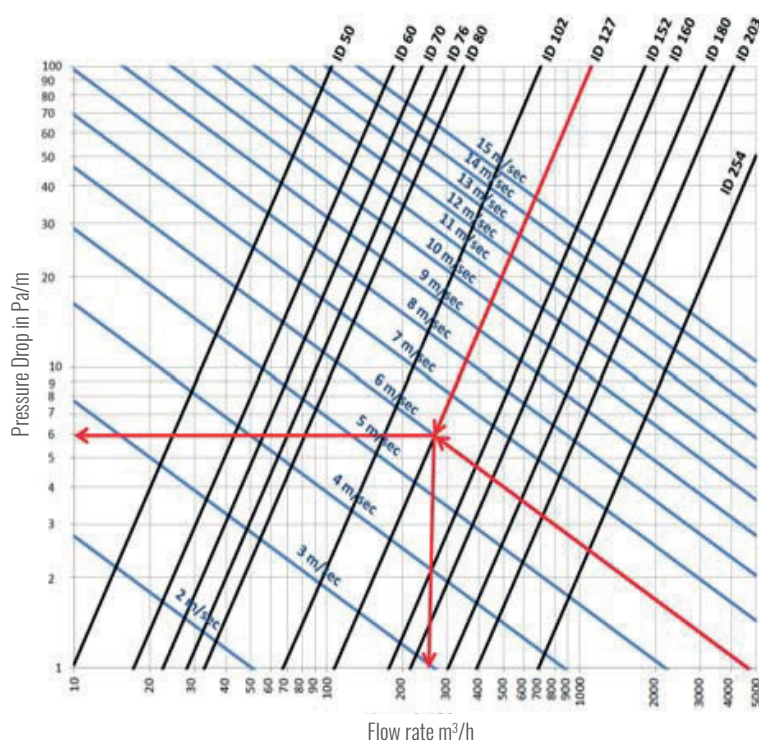

PRESSURE DROPS TABLE WITH CALCULATION EXAMPLES


To calculate the flow rates and pressure drops of the other diameters, use the beside diagram.

DIAMETER [mm]	AIR SPEED 8m/s		AIR SPEED 10m/s	
	WORKING PRESSURE [bar]	WORKING VACUUM [bar]	CURVATURE RADIUS [mm]	WEIGHT [gr/m]
51	0,7	0,18	35	96
63	0,7	0,15	42	115
70	0,6	0,13	49	128
80	0,5	0,09	56	154
102	0,4	0,08	70	200
127	0,4	0,07	92	254
152	0,2	0,05	105	308
160	0,15	0,05	110	331
180	0,15	0,05	130	438
203	0,15	0,04	140	492
254	0,08	0,03	175	600

CERTIFICATIONS

MATERIAL PROTECTION

FIRE REACTION



ANTIMICROBIAL PROTECTION





MasterSan™ is produced with new generation polyolefin film with Sanitized® antimicrobial and antiviral technology which protects the internal surface from damages due to microbial load and reduces the formation of potential microbial odors inside the ventilation system for a better IAQ rate.

IT

Class 1 (D.M. 26/06/84)
Omologation nr.: RE1205C20D100011

EU

Class B-s2, d0 (EN 13501-1:2009)

Count tests: JIS L 1902

Testing the antibacterial activity and efficacy on textile products

Country / Year: Japan / 2002

Test Item: 7 days, 8 days pre-treatment

Field of application: hydrophilic materials like textiles, food contact, hygiene

Sample size: Test specimens with 10 x 10 x 0.5 mm

Document No.: RE_2.2.1.1_1902_200902

GREEN BUILDING

Thanks also to the support of GreenMap, products manufactured by Tecnica srl contribute to obtain the credits of the major international rating systems for sustainable buildings:



LEED

Contributes to credits:
IP, EA, MR



WELL

Contributes to credits:
MATERIALS, COMMUNITY

BREEAM

BREEAM

Contributes to credits:
MAN, ENE, WST

For further details regarding the specific contributions to the credits indicated, contact Tecnica Srl

APPLICATIONS

OEM	Residential	Smooth surface	Flexibility	Easy Pack	Self-extinguishing	Mold Resistant	Microorganism Resistant	Tear Resistant
Calibrated Diameters*	REACH Certifie	RoHS Certifie	Halogen Free	Building	Transport	Air Conditioning	CMV	Non-magnetic*
Wall Trace	CMV transport means	CMV mech. means	Prolonged anti condensation	Recreational Boats				

*on request

WIRE OPTIONS

AM non-magnetic inox wire

ADDITIVE OPTIONS

UV * anti UV

SERVICE OPTIONS


MP customized marking

TESTS PERFORMED

TEST	METHOD	OUTCOMES
λ Coefficient of thermal conductivity	UNI EN 12664:2002	T = 0°C - 0,032 W/mK
		T = 10°C - 0,033 W/mK
		T = 30°C - 0,035 W/mK
		T = 60°C - 0,038 W/mK
Resistance to aggression by chemical agents	Test performed on non-insulated SA10/ESP duct - Application on the external surface of the specific chemical agent and check for any changes after 48h.	ETHANOL No modification and/or damage
		AMMONIA No modification and/or damage
		HIGH CONC. DEGREASER No modification and/or damage
		COOLANT FLUID No modification and/or damage
Maximum operating temperature peak	Test performed on non-insulated SA10/ESP duct - Identification of the maximum temperature peak bearable by the duct and all its components.	+115°C no longer than 2min.
Example of use limits in order to avoid the risk of condensation on the external wall	Option 1 Duct Ø 102	Flow rate temperature 15° Room Temperature 34° Room relative humidity 70%
	Option 2 Duct Ø 102	Flow rate temperature 10°C Room Temperature 28°C Room relative humidity 70%
Duct airtightness class	Test performed on non-insulated SA10/ESP duct - EN 12237 - EN 1507 - EN 12599	Class D
	Test performed on non-insulated SA10/ESP duct - EN 13180	Compliant

INSTALLATION FEATURES

T-Esp™

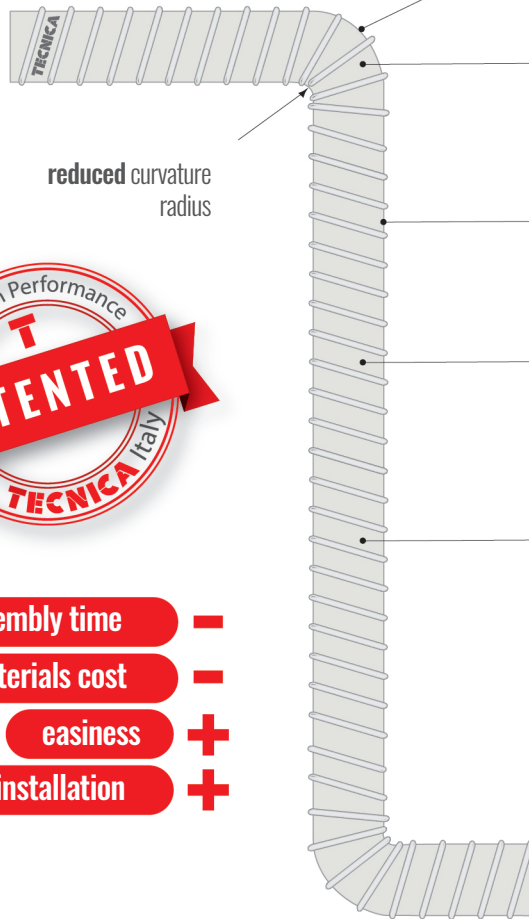

assembly time -

materials cost -

easiness +

quick installation +


No limitation to degrees of curvature on the products

Reduced pressure drop as the internal section remains unchanged even in the points of curvature


Single wall in netted closed cell of expanded polyethylene foam (R-value 0,12 m²K/W)

Lightness and self-supporting thanks to the reinforced structure with a spiral steel wire that also allows the internal section to remain unchanged at the points of curvature

Sanitized® antimicrobial and antiviral technology which protects the internal surface from damages due to microbial load and reduces the formation of potential microbial odors inside the ventilation system

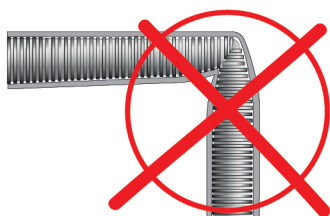

no risk of crushing in curves with tight radius

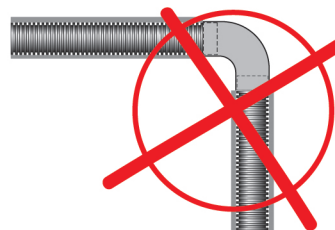

no connection systems or special pieces are required in the curves

corrugated ducts

