




VEA

Steel ventilation valve diffuser. The air flow rate is adjusted by screwing (reducing the flow rate) or unscrewing (increasing the flow rate) the central disc.

TECHNICAL SPECIFICATION AND USAGE LIMIT

INSTALLATION HEIGHT	APPLICATIONS	MATERIAL	COLOR	FASTENING	INSTALLATION	ADJUSTMENT
2,5 to 4 m	suitable for injecting or extracting air into/from small rooms (bathrooms, kitchens); it can also be used as return terminal in medium-large rooms.	Steel	RAL 9016 white.	ceiling-mounted or fitted directly on the ventilation or return duct in service rooms	Easy installation, adjustments and maintenance. The central disc is easy to remove by unscrewing the fastening nut and the central pin.	the air flow rate is adjusted by turning the disc away from (increasing the flow rate) or towards (reducing the flow rate) the external neck

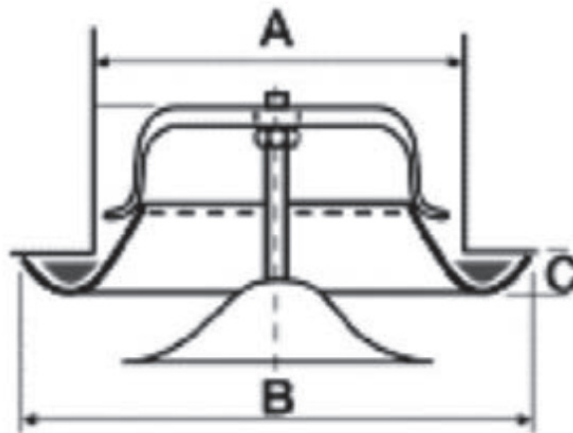






TECHNICAL DATA

Model	Ø A [mm]	Ø B [mm]	Ø C [mm]
100	100	137	12
150	160	212	12
200	200	248	12

TECHNICAL DATA

Model	Flow Rates	Cone opening [mm]	Pressure drop [Pa]	Noise level [dB(A)]	
100	100	10	50	25	
		5	90	28	
		0	180	35	
	125	10	70	28	
		5	140	34	
	150	10	100	33	
5		200	38		
150	160	5	46	22	
		0	70	24	
		-5	120	30	
	190	5	70	25	
		0	100	28	
		-5	180	35	
	220	10	55	24	
		5	85	28	
		0	130	32	
		-5	180	35	
	250	10	70	27	
		5	130	32	
		0	180	35	
	200	300	10	35	22
			0	65	32
-5			88	30	
-10			140	36	
350		10	49	26	
		0	100	34	
400		10	55	28	
		0	120	35	

APPLICATIONS

				
Residential	REACH Certificate	RoHS Certificate	Industry	Building

*on request