



SA10/ESP 8mm Patented MasterSan™

Flexible hose produced with exclusive technology by TECNICA SRL made of:

- Additivated polyolefin resins film with anti-bacterial, anti-mildew and anti-viral material protection.
- Thermo-insulating coating in netted and closed-cell of polyethylene foam (th. 8mm).
- External protection in additivated polyolefin resins film.
- Embedded steel wire helix.

The assembly of materials for the construction of the flexible conduit does not require the use of chemical agents, glues or adhesives.

Thermal resistivity at 20°C **R = 0,24m² K/W (UNI EN 12664:2002)**

MasterSan™
in collaboration with:



TECHNICAL SPECIFICATIONS AND USAGE LIMIT

COLOR	LENGTH	WORKING TEMPERATURE	PRODUCTION DIAMETERS	AIR SPEED	PRESSURE	CURVATURE RADIUS
Grey	10m standard	-20° + 90°C (peak +115°C)	from 40mm to 254mm	max 20m/sec	max 200 mmH ₂ O	1,2 - 1,8 x Ø

PRODUCTION DIAMETERS


40*	51	63	70	76	80	90*	102	110*	121*
127	133*	140*	152	160	165	180	203	254	

*Diameters available on request

Diameters other than those indicated are available by prior feasibility check.

PRESSURE DROPS DIAGRAM

(Air Temperature 20°C)

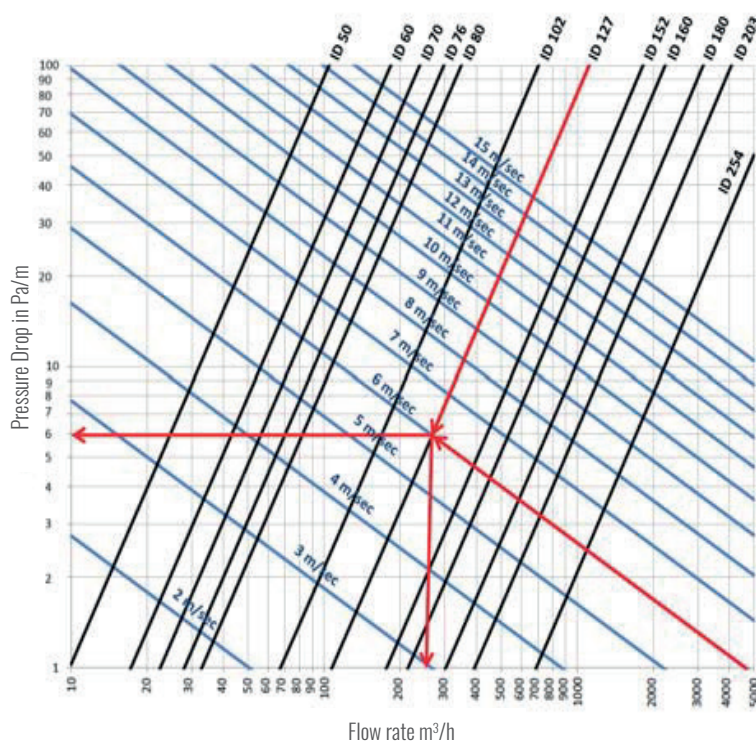


PRESSURE DROPS TABLE WITH CALCULATION EXAMPLES

To calculate the flow rates and pressure drops of the other diameters, use the beside diagram.

DIAMETER [mm]	AIR SPEED 8m/s		AIR SPEED 10m/s	
	WORKING PRESSURE [bar]	WORKING VACUUM [bar]	CURVATURE RADIUS [mm]	WEIGHT [gr/m]
51	0,7	0,18	35	96
63	0,7	0,15	42	115
70	0,6	0,13	49	128
80	0,5	0,09	56	154
102	0,4	0,08	70	200
127	0,4	0,07	92	254
152	0,2	0,05	105	308
160	0,15	0,05	110	331
180	0,15	0,05	130	438
203	0,15	0,04	140	492
254	0,08	0,03	175	600

CERTIFICATION

MATERIAL PROTECTION



Testing the antibacterial activity and efficacy on textile products

Country / Year:
Japan / 2022

Test item:
7 days, 8 days pre-treatment

Field application:
Hygiene materials like textiles,
floor covers, linings

Sample size:
Ten samples with 0.4 g of 1 x 1
textile determination

Scope:
The method is applied for the quantitative determination of the antibacterial effectiveness of non-diffusible active substances.

Abstract:
Samples are contaminated with a standard number of a given micro-organism (bacteria). After incubation for 18 hours at 37°C, the micro-organisms on the test material are washed off with a slight amount of water. The number of colony forming units (CFU) is determined and compared to the control. From this number the antimicrobial effect can be calculated.

Test assessment:
Evaluation is based on the difference in bacteria count (in terms of CFU) between one and 18 hour contact with the test material (zero reduction). "Significant Activity" if 99% germ reduction and 99% reduction rate.

Test organism:
Bacteriophage control ATCC 4329
Candida and ATCC 11025
Bacterial spores ATCC 4242

Explanation of the bacteriostatic activity:
0 CFU: germ growth, insufficient antibacterial effect
0.1 to 0.99%: no significant germ reduction, insufficient antibacterial effect
99%: significant germ reduction, good antimicrobial effect.



ANTIMICROBIAL PROTECTION
MasterSan™ is produced with new generation polyolefin film with Sanitized® antimicrobial and antiviral technology which protects the internal surface from damages due to microbial load and reduces the formation of potential microbial odors inside the ventilation system for a better IAQ rate.



FIRE REACTION

EU

Class B-s2, d0 (EN 13501-1:2009)

GREEN BUILDING

Thanks also to the support of GreenMap, products manufactured by Tecnica srl contribute to obtain the credits of the major international rating systems for sustainable buildings:



LEED

Contributes to credits:
IP, EA, MR



WELL

Contributes to credits:
MATERIALS, COMMUNITY

BREEAM

BREEAM

Contributes to credits:
MAN, ENE, WST

For further details regarding the specific contributions to the credits indicated, contact Tecnica Srl

APPLICATIONS

OEM	Residential	Smooth surface	Flexibility	Easy Pack	Self-extinguishing	Mold Resistant	Microorganism Resistant	Tear Resistant
Calibrated Diameters*	REACH Certifie	RoHS Certifie	Halogen Free	Building	Transport	Air Conditioning	CMV	Non-magnetic*
Wall Trace	CMV transport means	CMV mech. means	Prolonged anti condensation	Recreational Boats				

*on request

WIRE OPTIONS

AM non-magnetic inox wire

ADDITIVE OPTIONS

UV * anti UV

SERVICE OPTIONS


MP customized marking

TESTS PERFORMED

TEST	METHOD	OUTCOMES
λ Coefficient of thermal conductivity	UNI EN 12664:2002	T = 0°C - 0,032 W/mK
		T = 10°C - 0,033 W/mK
		T = 30°C - 0,035 W/mK
		T = 60°C - 0,038 W/mK
Resistance to aggression by chemical agents	Test performed on non-insulated SA10/ESP duct - Application on the external surface of the specific chemical agent and check for any changes after 48h.	ETHANOL No modification and/or damage
		AMMONIA No modification and/or damage
		HIGH CONC. DEGREASER No modification and/or damage
		COOLANT FLUID No modification and/or damage
Maximum operating temperature peak	Test performed on non-insulated SA10/ESP duct - Identification of the maximum temperature peak bearable by the duct and all its components.	+115°C no longer than 2min.
Example of use limits in order to avoid the risk of condensation on the external wall	Option 1 Duct Ø 102	Flow rate temperature 10°C Room Temperature 45°C Room relative humidity 70%
	Option 2 Duct Ø 102	Flow rate temperature 5°C Room Temperature 30°C Room relative humidity 80%
Duct airtightness class	Test performed on non-insulated SA10/ESP duct - EN 12237 - EN 1507 - EN 12599	Class D
	Test performed on non-insulated SA10/ESP duct - EN 13180	Compliant

INSTALLATION FEATURES

T-Esp™

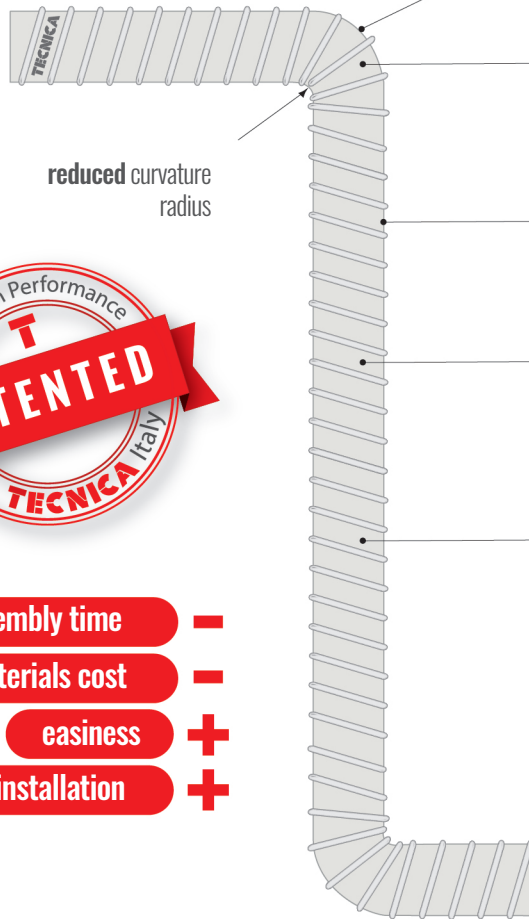

assembly time -

materials cost -

easiness +

quick installation +


No limitation to degrees of curvature on the products

Reduced pressure drop as the internal section remains unchanged even in the points of curvature


Single wall in netted closed cell of expanded polyethylene foam (R-value 0,24 m²K/W)

Lightness and self-supporting thanks to the reinforced structure with a spiral steel wire that also allows the internal section to remain unchanged at the points of curvature

Sanitized® antimicrobial and antiviral technology which protects the internal surface from damages due to microbial load and reduces the formation of potential microbial odors inside the ventilation system

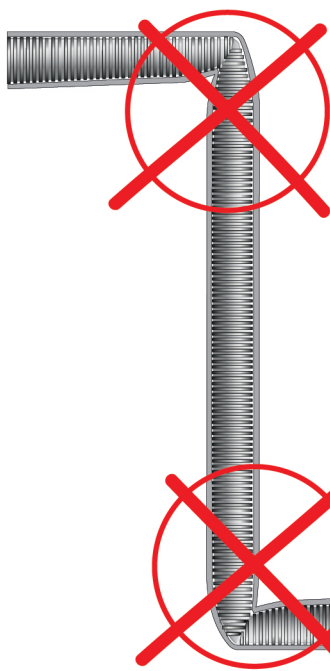

no risk of crushing in curves with tight radius

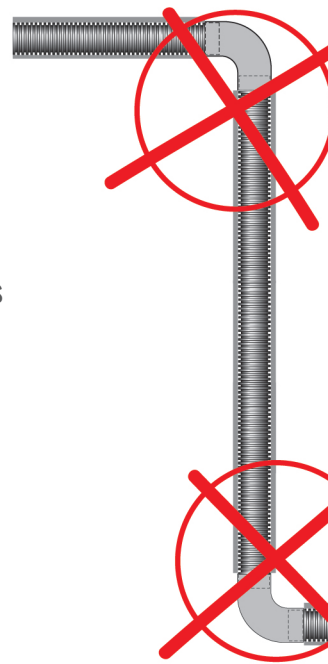

no connection systems or special pieces are required in the curves

corrugated ducts